



Semaphore

- Semaphore S – integer variable
- Two standard operations modify S : `wait()` and `signal()`
 - Originally called `P()` and `V()`
- Can only be accessed via two indivisible (atomic) operations
 - `wait (S) {`
 - `while S <= 0`
 - `; // no-op`
 - `S--;`
 - `}`
 - `signal (S) {`
 - `S++;`
 - `}`





Semaphore as General Synchronization Tool

- **Counting** semaphore – integer value can range over an unrestricted domain
- **Binary** semaphore – integer value can range only between 0 and 1; can be simpler to implement
 - Also known as **mutex locks**
- Can implement a counting semaphore **S** as a binary semaphore
- Provides mutual exclusion

```
Semaphore mutex; // initialized to 1
do {
    wait (mutex);
    // Critical Section
    signal (mutex);
    // remainder section
} while (TRUE);
```





Semaphore Implementation with no Busy waiting

- With each semaphore there is an associated waiting queue. Each entry in a waiting queue has two data items:
 - value (of type integer)
 - pointer to next record in the list

- Two operations:
 - **block** – place the process invoking the operation on the appropriate waiting queue.
 - **wakeup** – remove one of processes in the waiting queue and place it in the ready queue.





Semaphore Implementation with no Busy waiting (Cont.)


- Implementation of wait:

```
wait(semaphore *S) {  
    S->value--;  
    if (S->value < 0) {  
        add this process to S->list;  
        block();  
    }  
}
```

- Implementation of signal:

```
signal(semaphore *S) {  
    S->value++;  
    if (S->value <= 0) {  
        remove a process P from S->list;  
        wakeup(P);  
    }  
}
```






Deadlock and Starvation

- **Deadlock** – two or more processes are waiting indefinitely for an event that can be caused by only one of the waiting processes
- Let **S** and **Q** be two semaphores initialized to 1

P_0	P_1
wait (S);	wait (Q);
wait (Q);	wait (S);
.	.
.	.
.	.
signal (S);	signal (Q);
signal (Q);	signal (S);


- **Starvation** – indefinite blocking. A process may never be removed from the semaphore queue in which it is suspended
- **Priority Inversion** - Scheduling problem when lower-priority process holds a lock needed by higher-priority process






Classical Problems of Synchronization


- Bounded-Buffer Problem
- Readers and Writers Problem
- Dining-Philosophers Problem






Bounded-Buffer Problem

- N buffers, each can hold one item
- Semaphore **mutex** initialized to the value 1
- Semaphore **full** initialized to the value 0
- Semaphore **empty** initialized to the value N .

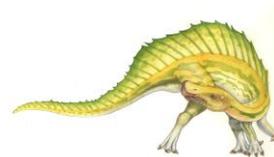





Bounded Buffer Problem (Cont.)

- The structure of the producer process

```
do {  
  
    // produce an item in nextp  
  
    wait (empty);  
    wait (mutex);  
  
    // add the item to the buffer  
  
    signal (mutex);  
    signal (full);  
} while (TRUE);
```






Bounded Buffer Problem (Cont.)

- The structure of the consumer process

```
do {  
    wait (full);  
    wait (mutex);  
  
    // remove an item from buffer to nextc  
  
    signal (mutex);  
    signal (empty);  
  
    // consume the item in nextc  
  
} while (TRUE);
```







Readers-Writers Problem

- A data set is shared among a number of concurrent processes
 - Readers – only read the data set; they do **not** perform any updates
 - Writers – can both read and write

- Problem – allow multiple readers to read at the same time. Only one single writer can access the shared data at the same time

- Shared Data
 - Data set
 - Semaphore **mutex** initialized to 1
 - Semaphore **wrt** initialized to 1
 - Integer **readcount** initialized to 0

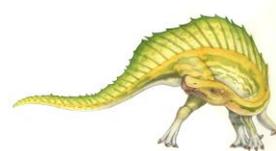





Readers-Writers Problem (Cont.)

- The structure of a writer process

```
do {  
    wait (wrt) ;  
  
    // writing is performed  
  
    signal (wrt) ;  
} while (TRUE);
```







Readers-Writers Problem (Cont.)


- The structure of a reader process

```
do {  
    wait (mutex) ;  
    readcount ++ ;  
    if (readcount == 1)  
        wait (wrt) ;  
    signal (mutex)  
  
    // reading is performed  
  
    wait (mutex) ;  
    readcount - - ;  
    if (readcount == 0)  
        signal (wrt) ;  
    signal (mutex) ;  
} while (TRUE);
```






Dining-Philosophers Problem

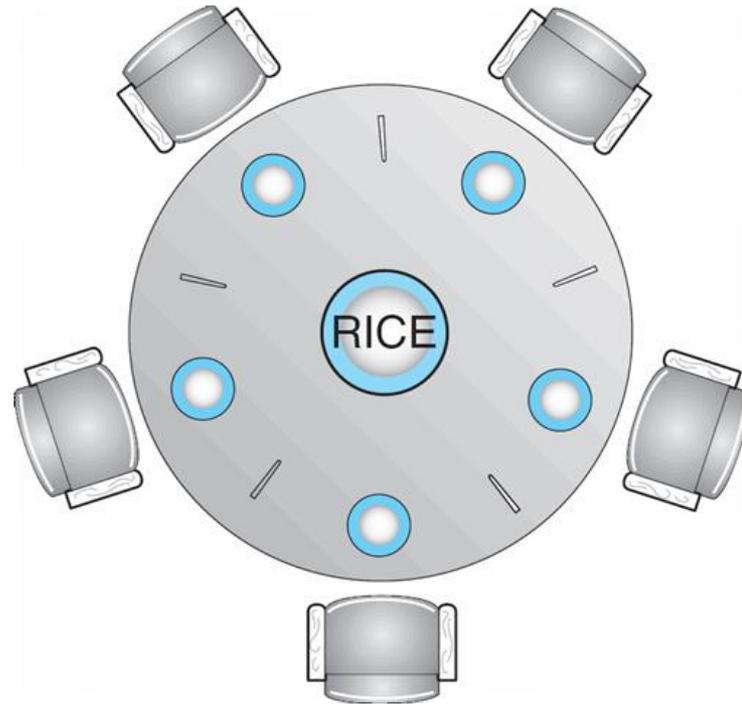

- Shared data
 - Bowl of rice (data set)
 - Semaphore **chopstick [5]** initialized to 1







Dining-Philosophers Problem (Cont.)

- The structure of Philosopher i :


```
do {  
    wait ( chopstick[i] );  
    wait ( chopStick[ (i + 1) % 5] );  
  
    // eat  
  
    signal ( chopstick[i] );  
    signal ( chopstick[ (i + 1) % 5] );  
  
    // think  
  
} while (TRUE);
```






Problems with Semaphores

- Correct use of semaphore operations:
 - signal (mutex) wait (mutex)
 - wait (mutex) ... wait (mutex)
 - Omitting of wait (mutex) or signal (mutex) (or both)







Linux Synchronization

- Linux:
 - Prior to kernel Version 2.6, disables interrupts to implement short critical sections
 - Version 2.6 and later, fully preemptive


- Linux provides:
 - semaphores
 - spin locks

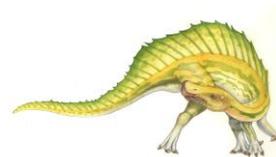




Pthreads Synchronization

- Pthreads API is OS-independent
- It provides:
 - mutex locks
 - condition variables
- Non-portable extensions include:
 - read-write locks
 - spin locks






Pthreads Mutex

- Mutex is an abbreviation for "mutual exclusion". Mutex variables are one of the primary means of implementing thread synchronization and for protecting shared data when multiple writes occur.
- A mutex variable acts like a "lock" protecting access to a shared data resource. The basic concept of a mutex as used in Pthreads is that only one thread can lock (or own) a mutex variable at any given time. Thus, even if several threads try to lock a mutex only one thread will be successful. No other thread can own that mutex until the owning thread unlocks that mutex.
- Very often the action performed by a thread owning a mutex is the updating of global variables. This is a safe way to ensure that when several threads update the same variable, the final value is the same as what it would be if only one thread performed the update.
- When protecting shared data, it is the programmer's responsibility to make sure every thread that needs to use a mutex does so. For example, if 4 threads are updating the same data, but only one uses a mutex, the data can still be corrupted.





Pthreads Condition Variables

- While mutexes implement synchronization by controlling thread access to data, condition variables allow threads to synchronize based upon the actual value of data.
 - Without condition variables, the programmer would need to have threads continually polling to check if the condition is met. A condition variable is a way to achieve the same goal without polling.
- A condition variable is always used in conjunction with a mutex lock.





Main Thread

- Declare and initialize global data/variables which require synchronization
- Declare and initialize a condition variable object
- Declare and initialize an associated mutex
- Create threads A and B to do work

Thread A

- Do work up to the point where a certain condition must occur
- Lock associated mutex and check value of a global variable
- Call `pthread_cond_wait()` to perform a blocking wait for signal from Thread-B. Note that a call to `pthread_cond_wait()` automatically and atomically unlocks the associated mutex variable so that it can be used by Thread-B.
- When signalled, wake up. Mutex is automatically and atomically locked.
- Explicitly unlock mutex
- Continue

Thread B

- Do work
- Lock associated mutex
- Change the value of the global variable that Thread-A is waiting upon.
- Check value of the global Thread-A wait variable. If it fulfills the desired condition, signal Thread-A.
- Unlock mutex.
- Continue

Main Thread Join / Continue



End of Chapter 5

